

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 4 TOWNSHIP 14 RANGE 3

DATE: -12-20-01- 2-3-06

PARTY CHIEF: Wilcoxon

CREW: Harrison

TYPE OF MARKER: Section Corner cap no cap

METHOD OF ESTABLISHMENT: County: 11-24-97



IN. S.P.C. E ZONE NAD '83

NAME: 14030402

N: 493464.1748(m)

E: 53726.0095(m)

Thompson Rd 5000 S

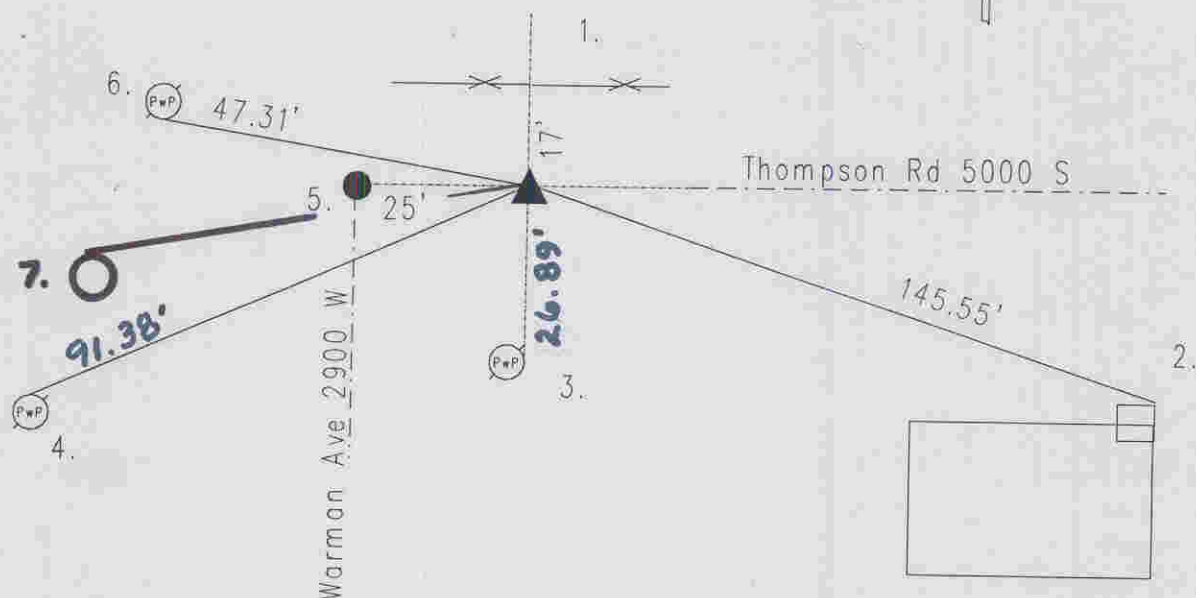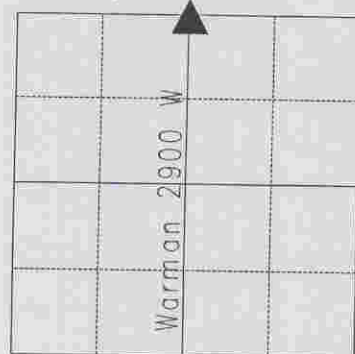

Original post set 1820 by Laughlin with witnesses: 24" white oak N 40 E 47 links; 30" dogwood S 9 W 19 links per Marion County Atlas pg. 5. Hosbrook 10-9-1850 called no stone but the half mile witness was plain per Perry Township Legal Survey Book pg. 13. Clevenger 3-1-75 called a PK nail. Cleveland 4-18-83 called 1/2" iron pipe. Gries 10-20-88 called a 1/2" iron pipe. Wilcoxon 1-31-95 called a PK nail over iron pipe. Excavated 11-24-97 by Wilcoxon and a 1/2" iron pipe was found 12" down. No stone found during excavation. Harrison set, Re-tied 12-20-01 by Wilcoxon.

14030402

REF.	DISTANCE	DESCRIPTION
1.	17.00'	Due N to fence line
2.	145.55'	NE corner of brick column ADDRESS 2737
3.	26.89'	Due S to PK nail E PwP#117-691 12"up
4.	91.38'	PK nail E PwP#119-690 15"up
5.	25.00'	Due W to C/L of Warman Avenue 2900 W
6.	47.31'	PK nail S PwP#104-690 12"up
7.	56.87'	Mag nail w/bw N PwP#194-690 10"up